


Elastische Bolzenkupplung TYP KST1

mit Bremstrommel nach DIN 15431

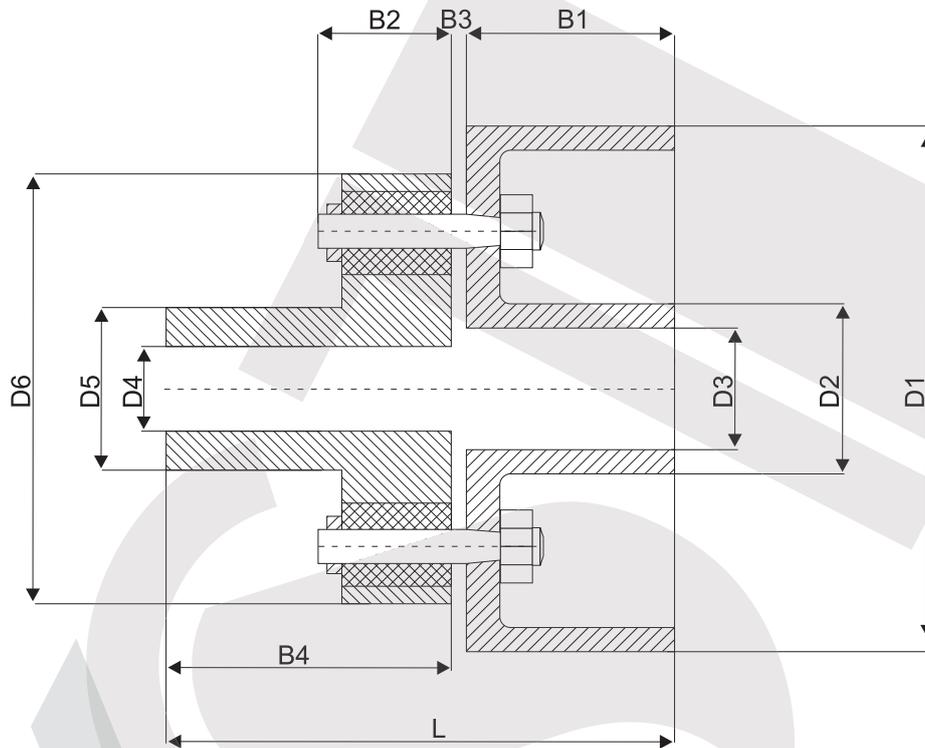

D1	TkN (Nm)	Tkmax (Nm)	D4 Vorb.	D4 H7	D5	D6	B2	B3	B4	L	Masse (kg)	J kgm	max.zul. Drehz./min
200	160	240	14	45	65	123	54	3 +/-1	60	138	8	0,043	3000
200	400	600	20	55	78	151	67	5 +/-2	80	160	11	0,048	3000
250	160	240	14	45	65	123	54	3 +/-1	60	158	12	0,108	3000
250	400	600	20	55	78	151	67	5 +/-2	80	180	14	0,112	3000
250	1000	1500	25	75	108	198	87	5 +/-2	110	210	22	0,154	3000
315	400	600	20	55	78	151	67	5 +/-2	80	203	21	0,320	3000
315	1000	1500	25	75	108	198	87	5 +/-2	110	233	29	0,397	3000
315	2500	3750	35	95	145	250	102	5 +/-2	140	263	48	0,497	3000
400	1000	1500	25	75	108	198	87	5 +/-2	110	256	45	1,049	2400
400	2500	3750	35	95	145	250	102	5 +/-2	140	295	72	1,359	2400
500	2500	3750	35	95	145	250	102	5 +/-2	140	335	103	3,657	1900
500	6300	9450	45	120	165	320	122	8 +/-3	170	368	115	6,585	1900
630	6300	9450	45	120	165	320	122	8 +/-3	170	414	156	10,259	1500
710	10000	15000	55	130	175	380	142	8 +/-3	170	443	245	18,804	1350
710	16000	24000	65	160	210	440	155	10 +/-4	210	485	255	19,479	1350

Sie werden überrascht sein wie günstig und schnell wir sind